
Gimbal™ SDK for iOS Documentation

V 1.16

October 2014

Gimbal, Inc.

Gimbal, Inc. Confidential and Proprietary

Restricted Distribution: Not to be used, copied, reproduced in whole or in part, nor its contents revealed in any manner to others without the express written permission of Gimbal, Inc.

SDK License Agreement: The use of the Gimbal™ SDK is subject to the terms and conditions outlined in the SDK License Agreement available at <https://manager.gimbal.com/sdk-license/>

Gimbal, Inc.
11010 Roselle St, Ste 150
San Diego, CA 92121
U.S.A.

Gimbal™ SDK for iOS Documentation
V 1.16
October 2014

Gimbal is a registered trademark of Gimbal, Inc. in the United States and may be registered in other countries. Other product and brand names may be trademarks or registered trademarks of their respective owners.

This technical data may be subject to U.S. and international export, re-export, or transfer (“export”) laws. Diversion contrary to U.S. and international law is strictly prohibited.

Contents

2	1 Introduction	6
3	1.1 Purpose and scope of this document	6
4	1.2 Who should use this document	6
5	1.3 Conventions.....	6
6	1.4 Revision history	6
7	1.5 Acronyms, abbreviations, and definitions	7
8	1.6 References	7
9	2 Overview	7
10	2.1 Gimbal Components.....	7
11	2.2 What constitutes the Gimbal™ SDK.....	7
12	2.3 Overview of the API.....	8
13	2.4 Pre-requisites	9
14	3 Setting up your application	10
15	3.1 Setting up your application in Gimbal Manager.....	10
16	3.2 Configuring Your Application for the SDK	10
17	3.2.1 Setting up the UserContext.plist file	10
18	3.2.2 Importing frameworks into Xcode	11
19	4 Using the QLContextCoreConnector	13
20	4.1 Quick Start.....	13
21	4.2 Enable the connector and check its status	13
22	4.2.1 Check the status.....	13
23	4.2.2 Enable the connector	13
24	4.3 Next steps.....	14
25	4.4 Deleting a users data and disabling Gimbal	14
26	5 Geofence	15
27	5.1 Place monitoring.....	15
28	5.1.1 Initialize connector.....	15
29	5.1.2 Add delegate	15
30	5.1.3 Listening for place event	15
31	5.1.4 Checking if place monitoring is available	16
32	5.2 Private Places.....	16
33	5.2.1 Creating a new private place	16
34	5.2.2 Getting existing private places	17
35	5.2.3 Updating a private place.....	17

1	5.2.4 Deleting a private place	18
2	5.2.5 Retrieving the top 20 private points of interest	18
3	5.3 Geofence Filtering	18
4	5.3.1 Adding delegate	19
5	5.3.2 Remove delegate	19
6	5.4 Geofence Control	19
7	6 Interest Sensing	20
8	6.1 Quick Start	20
9	6.2 Listening for User Interests	20
10	6.2.1 Retrieve the connector	20
11	6.2.2 Request the Profile	20
12	6.2.3 Set custom profile attributes	21
13	7 Communicate	22
14	7.1 Place based communicate	22
15	7.1.1 Quick Start	22
16	7.1.1.1 Listening for content	22
17	7.1.1.1.1 Initialize connectors	22
18	7.1.1.1.2 Start Listening	22
19	7.1.1.1.3 Implement protocol method	22
20	7.1.1.1.4 Stop listening	23
21	7.1.2 Retrieving content event history	23
22	7.2 Time based communicate	23
23	7.2.1 Setup Gimbal Push	23
24	7.2.2 Quick Start	23
25	7.2.2.1 Register for Gimbal Push Notification	23
26	7.2.2.2 Register Device Token	24
27	7.2.2.3 Listen to Remote Notifications	24
28	7.2.2.4 Listen to Application Launch	24
29	7.2.2.5 Unregister Gimbal Push Notification	24
30	7.2.3 Listening for Content	24
31	7.2.3.1 Initialize connectors	24
32	7.2.3.2 Start Listening	25
33	7.2.3.3 Implement protocol method	25
34	7.2.4 Fetching Content	25
35	7.2.4.1 Fetching content by ID	25
36	7.2.4.2 Fetching content based on time range	26
37	7.2.5 Content Search	26
38	7.2.5.1 By attribute	26
39	7.3 Disabling Communications	27

1	8 Permissions (Gimbal Privacy)	27
2	8.1 Listening for permission change	27
3	8.1.1 Start Listening for subscription permission	27
4	8.1.2 Implement protocol method	27
5	8.1.3 Start Listening for location permission	27
6	8.1.4 Implement protocol method	27
7	8.1.5 Stop listening	28
8	9 Analytics	29
9	9.1 About	29
10	9.2 Types of Analytic Events	29
11	9.2.1 QLContentNotifiedEvent, QLContentClickedEvent, and QLContentDisplayedEvent	29
12	9.3 Analytics Connector	29
13	10 Getting events when your application is not running	30
14	11 Error codes and messages	31

15

1 Introduction

1.1 Purpose and scope of this document

This document describes how to use the *Gimbal* framework to develop iOS applications that can benefit from *contextual* Services

1.2 Who should use this document

Any developer who wants to develop a User Context aware application

1.3 Conventions

- *Italics* is used to reflect technical information.
- Casing is important for everything in italics and all examples (font size is used to highlight blocks only).
- We assume the reader is familiar with JSON [JSON].

1.4 Revision history

The following revisions have been made to this document.

Revision	Date	Reason for change
1.0	June 2012	SDK Documentation
1.1	September 2012	Added place attributes to places in Section 5.2.1
1.2	December 2012	Removed Image Recognition from documentation
1.3	March 2013	Adding Geofence control section
1.4	March 2013	Adding section to disable communications on the client
1.5	April 2013	Added Gimbal push notification
1.7.1	May 2013	Added reference to libz.dylib SDK dependency
1.8	May 2013	Adding section for Disabling selective place monitoring
1.9	June 2013	Added documentation for deleting user data
1.10	June 2013	Added section 7.2.5 for searching content by attributes Added ContentAttributes field to ContentDescriptor type
1.12	July 2013	Added section 9 for logging analytics.
1.14	February 2014	Removed Sandbox environment.
1.15	May 2014	Renaming QRS to Gimbal
1.16	October 2014	Company address change

1.5 Acronyms, abbreviations, and definitions

The following terms are used in this document. Some elements are identified by more than one term.

Term	Definition
Gimbal	The name of the Gimbal solution
Organization	The organization the 3 rd -party developer represents and is developing the application on behalf of.

1.6 References

[Profile] Gimbal Interests Profiling

[Software License Agreement] <http://www.manager.gimbal.com/sdk-license/>

2 Overview

2.1 Gimbal Components

You are probably using Gimbal in part to push relevant content to users at the correct time and at the correct location. In the overall Gimbal eco-system, you want to understand the roles and responsibilities of its various components:

Gimbal™ Manager – accessed via web browser to:

- Generate the API key for your iOS application
- Provide shared geofences you want monitored in your iOS application
- Push content you want the user to receive based on time, location, and interests

Gimbal™ SDK for iOS – an SDK for iOS composed of several frameworks which includes header files and binaries used to compile your iOS application for either a device or simulator:

- Runs a service in the background that monitors user activity
- Identifies user interests
- Monitors geofences and notifies the client application of geofence events and content events when the application has configured itself as a listener
- Allows application to retrieve user interests

2.2 What constitutes the Gimbal™ SDK

The SDK contains the following components:

- 1 • Gimbal SDK frameworks
 - 2 ○ Common.embeddedframework
 - 3 ○ NetworkServices.embeddedframework
 - 4 ○ ContextCore.embeddedframework
 - 5 ○ ContextLocation.embeddedframework
 - 6 ○ ContextProfiling.embeddedframework
- 7 • Documentation
- 8 • Sample application source code (Xcode project)
- 9 • This document (The Gimbal™ SDK for iOS)

10 2.3 Overview of the API

11 The frameworks you will find in the SDK let you enhance your applications with user contextual
12 information including:

- 13 • Geofence monitoring (defined by the application, the user or by a representative of your
14 organization in the Gimbal Manager)
- 15 • Content delivery to the user triggered by geofence events and/or time
- 16 • Access user interests

17 The SDK exposes these interfaces through a series of modules (frameworks), each exposing a
18 *connector*. The following connectors are available:

- 19 • *QLContextCoreConnector* (required)
- 20 • *QLContextPlacesConnector* (optional)
- 21 • *PRContextInterestsConnector* (optional)

22 The *QLContextCoreConnector* connector is required for basic operations (solution enablement)
23 and additional connectors can be used as needed. To leverage the connector features the
24 appropriate frameworks are required in your application framework dependencies.

25 As part of the connectors, user interfaces are included and will be showed to users to let them
26 manage the permissions of features they want to enable or disable. At a high level, users can
27 turn on or off Gimbal. At a more fine-grained level they can manage the following permissions:

- 28 • Places
- 29 • Interests

30 For instance, users can turn off places so that your application will no longer receive geofences
31 events but can still access user interests.

32 The table below explains the mapping between features and modules (frameworks) and how
33 they jointly work:

Feature	Required frameworks	Description
Core	<ul style="list-style-type: none"> • Common • NetworkServices • ContextCore 	<ul style="list-style-type: none"> • Enable the APIs • Check status of APIs • Display the Permissions UI

Geofencing	Core frameworks plus: <ul style="list-style-type: none"> ContextLocation 	<ul style="list-style-type: none"> Listen for geo-fence events Listen for content Retrieve geo-fence event history Retrieve content history Create, read, update, and delete user defined places Retrieve private points of interests Retrieve and listen for geofencing user permission
Interests	Core frameworks plus: <ul style="list-style-type: none"> ContextProfiling 	<ul style="list-style-type: none"> Retrieve user interests Retrieve and listen for interests user permission

2.4 Pre-requisites

- SDK & Software versions
 - iOS SDK: 5.0 or later
 - Xcode: 4.3.1, other versions may work but have not been tested
 - You must have obtained an iOS developer account from Apple
 - You must have a provisioning profile that includes any devices that you wish to test with
- Hardware
 - SDK works on iPhone 4 or higher (SDK does not support 3gs, etc.)

3 Setting up your application

3.1 Setting up your application in Gimbal Manager

Obtain an application key (API Key) from the Gimbal Manager Apps Manager page (<https://manager.gimbal.com>) in order to enable your app to work with Gimbal.

Then log in to Gimbal Manager using the username and password for your organization. Choose the 'My Apps' button in the top navigation. Fill in the appropriate information into the form and click generate.

Field	Expected Value
Identifier	On iOS this is your application's bundleIdentifier.


3.2 Configuring Your Application for the SDK

3.2.1 Setting up the UserContext.plist file

The SDK uses a *plist* file in your projects directory, called *UserContext.plist*, to define application specific properties that enable the SDK.

SDK supports the following properties:

Name	Description	Required
<i>PRODUCTION_API_KEY</i>	Production API key that identifies your application.	Required if APPSTORE_BUILD is YES
<i>FEATURE_NAME</i>	The text you wish to use in your application to describe the value added feature you are providing for your users.	YES
<i>FEATURE_DESCRIPTION</i>	The description you wish to convey to the users about what your application does and any other information you would like the user to know about your application	NO

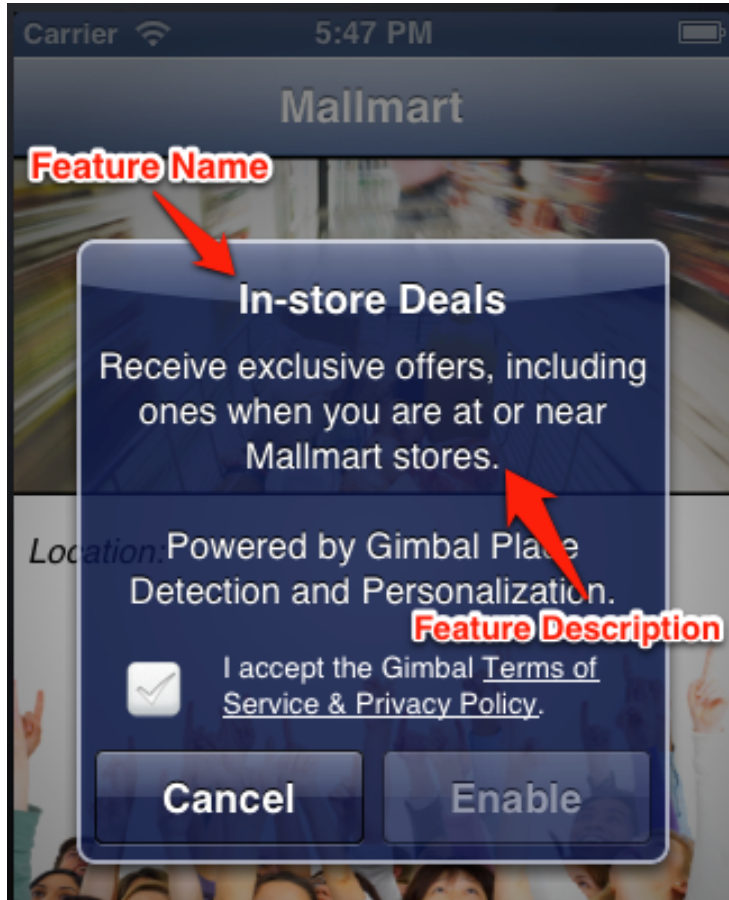

1

3.2.2 Importing frameworks into Xcode

2

The SDK is composed of multiple frameworks, some required and some optional.

3


- 4 • Required
 - 5 ○ Common.embeddedframework
 - 6 ○ NetworkServices.embeddedframework
 - 7 ○ ContextCore.embeddedframework
- 8 • Optional
 - 9 ○ ContextLocation.embeddedframework
 - 10 ○ ContextProfiling.embeddedframework

8

9

10

11 Drag and drop these frameworks from the unzipped SDK folder, into the Frameworks group of
12 your Xcode project as shown in the figure below.

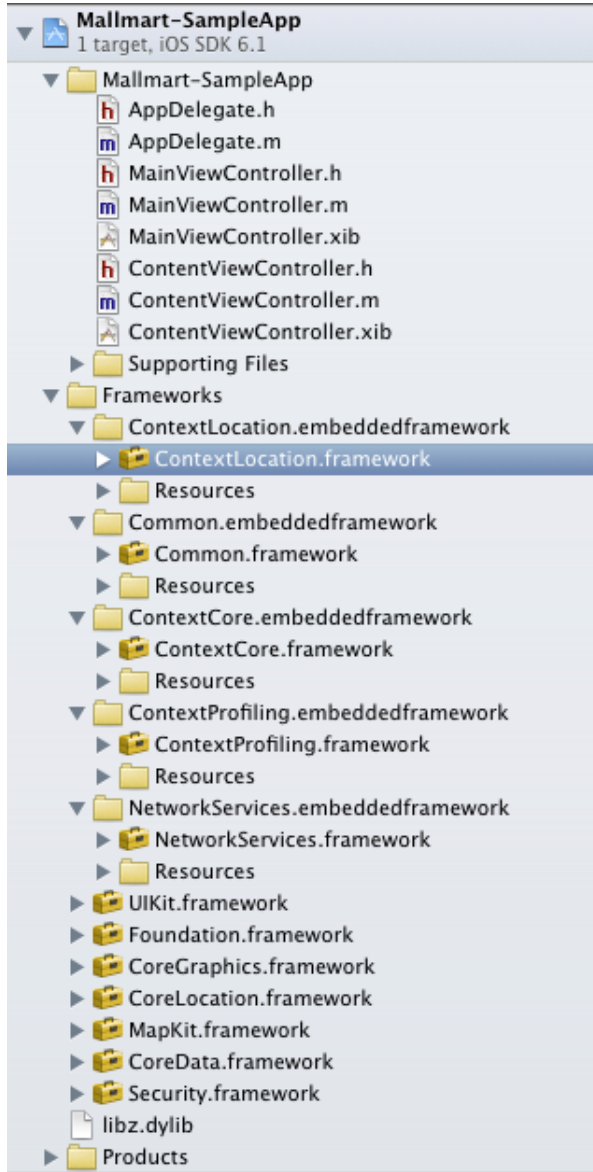

1

2

3

The SDK depends on multiple frameworks that are packaged with the iOS SDK. Here is the list of frameworks that has to be added to your application

4

- MapKit.framework

5

- CoreLocation.framework

6

- Security.framework

7

- CoreData.framework

8

- UIKit.framework

9

- Foundation.framework

10

- CoreGraphics.framework

11

- libz.dylib

4 Using the QLContextCoreConnector

The *QLContextCoreConnector* must be enabled prior to using any other features. All calls to the API will return failures with a disabled status message until this step is complete.

4.1 Quick Start

1. Create an instance of the core connector
2. Then call *checkStatusAndOnEnabled:disabled:* on this instance. This will call you back on either the enabled: or the disabled: block
3. If connector is 'disabled', then call *enableFromViewController:success:failure:*. This call will prompt the user with terms of service the first time and show the permission UI screen
4. If connector is 'enabled', then you can start using other connectors (see sections below)

Note that your application must ALWAYS include a button/tab/link in its settings to call *showPermissionsFromViewController:success:failure* so that users can always have the ability to change permissions settings.

4.2 Enable the connector and check its status

The *QLContextCoreConnector* has two methods used to check the status of and possibly enable the *QLContextCoreConnector*. The *enableFromViewController:success:failure:* method is used to enable the SDK for use by the end user. The *checkStatusAndOnEnabled:disabled:* method allows your application to ensure that it has been previously enabled.

These calls are asynchronous and use objective-c blocks to return results when they are available.

4.2.1 Check the status

```
[self.contextCoreConnector
  checkStatusAndOnEnabled:
    ^(QLContextConnectorPermissions *contextConnectorPermissions) {
        // do something if enabled
    }
  disabled:^(NSError *error) {
        // enable connector
    }];
```

4.2.2 Enable the connector

```
QLContextCoreConnector *contextCoreConnector = [[QLContextCoreConnector alloc] init];

[contextCoreConnector
  enableFromViewController:self.navigationController
```

```
1     success:^(
2         // do something when enabled
3     )
4     failure:^(NSError *error) {
5         // Check your credentials and retry
6     }];
```

4.3 Next steps

Now that the connector is enabled you can use the places and interests connectors to implement the core functionality of the SDK.

4.4 Deleting a users data and disabling Gimbal

```
11 [self.contextCoreConnector deleteAllUserDataAndOnSuccess:^(
12     NSLog(@"User data deletion SUCCESS");
13 } failure:^(NSError *error) {
14     NSLog(@"User data deletion FAILURE: %@", error );
15 }];
```

5 Geofence

Your application can receive a geofence event when the user's device enters or exits places you set in the Gimbal Manager (called public places in this section) or defined by your application (private places). The Gimbal Geofence Manager is used to manage public places while the private places are automatically created and managed on the user's device. The user's private places are not available on the Gimbal Manager.

Geofence and Content events happen mostly in the background of your application. So, it's important to initialize the connectors and delegates within your application's *AppDelegate* `didFinishLaunchingWithOptions`: method or classes that are initialized within this method.

Initializing connectors here allows our SDK to start monitoring for geofence events and deliver content to your application in the background.

Gimbal SDK always runs in the background even when your application is not in the foreground.

5.1 Place monitoring

5.1.1 Initialize connector

```
self.contextPlaceConnector = [[QLContextPlaceConnector alloc] init];
```

5.1.2 Add delegate

Implement the protocol *QLContextPlaceConnectorDelegate* to in order to receive place events, content associated to places, place permission change etc. Add this implementation on *contextPlaceConnector*.

```
self.contextPlaceConnector.delegate = self;
```

5.1.3 Listening for place event

Implement *didGetPlaceEvent* method to listen for place events. Gimbal SDK will call this method when it detects Entry/Exit for a place

```
- (void)didGetPlaceEvent: (QLPlaceEvent *)placeEvent
{
    // do something with the place event
}
```

Note: See section 4.1.1

The following fields are available in the *QLPlaceEvent* passed to the listener:

Field Name	Description
------------	-------------

<i>placeType</i>	<i>QLPlaceTypeOrganization</i> refers to places created in Context Console and applies to all of your users. A <i>QLPlaceTypePrivate</i> is created locally on the phone and only applies to a single user.
<i>eventType</i>	<i>QLPlaceEventTypeAt</i> means that the user has arrived at the place. <i>QLPlaceEventTypeLeft</i> means that the user has just left the place.
<i>Place</i>	The <i>QLPlace</i> object associated with the event
<i>Time</i>	The time of the event in milliseconds since 1970 (see <code>System.currentTimeMillis()</code>).

5.1.4 Checking if place monitoring is available

The Gimbal SDK does not support place monitoring on devices such as the iPhone 3GS due to the hardware not being battery efficient to continually monitor geofences in the background. To determine if the device supports place monitoring, call the `isPlaceMonitoringAvailable` on the `QLContextPlaceConnector` to see if the current device supports place monitoring.

5.2 Private Places

A “private place” is a place specific (and private) to the end-user. Your app can create user-defined places. In addition, the Gimbal SDK can automatically create these places from user activities; Gimbal determines the twenty (20) places that a user goes to regularly and/or spends time at.

Each application on a phone that uses Gimbal SDK can create places that are specific to the user of that particular phone. These places are independent of the places created with Gimbal’s Geofence Manager. User-defined places are not shared between applications and cannot be managed with Gimbal Geofence Manager. These places can be used to trigger location events.

5.2.1 Creating a new private place

This function lets you create new user-specific places. For example, this could be called by a `MapActivity` that allows the user to select a location and a place radius. The radius must be set to 50 meters or greater.

As of SDK version 0.31, a `Place` object supports “**place attributes**”. A place attribute is a key/value pair that can be used to set custom properties on a place. **Note:** The “id” field must NOT be set when creating a place.

```
- (void)createPlace
{
```



```

1  QLPlace *place = [[QLPlace alloc] init];
2  place.name = @"Home";
3  QLGeoFenceCircle *circle = [[QLGeoFenceCircle alloc] init];
4  circle.latitude = 32.893;
5  circle.longitude = -117.199;
6  circle.radius = 100;
7  place.geoFence = circle;
8
9  NSMutableDictionary *placeAttributesDictionary = [[NSMutableDictionary alloc] init];
10 [placeAttributesDictionary setValue:@"TYPE" forKey:@"Airport"];
11 [placeAttributesDictionary setValue:@"APPLICATION_SPECIFIC_PLACE_ID" forKey:@"101"];
12
13 QLPlaceAttributes *placeAttributes = [[QLPlaceAttributes alloc] initWithPlaceAttributes:placeAttributesDictionary];
14 [place setPlaceAttributes:placeAttributes];
15
16
17 [self.contextPlaceConnector createPlace:place
18     success:^(QLPlace *place)
19     {
20         // do something after place was created successfully
21     }
22     failure:^(NSError *error)
23     {
24         // failed with statusCode
25     }];
26 }

```

27 Depending on the result method that gets called in the callback, you may need to take
28 corrective action.

29 If *success()* is called, the Place will have an id which will permanently identify the newly created
30 place. If you later need to delete or update the place, this id will be used to identify the correct
31 place.

32 5.2.2 Getting existing private places

33 This function will retrieve a list of existing private places.

```

34 - (void)allPlacesAndOnSuccess
35 {
36     [self.contextPlaceConnector allPlacesAndOnSuccess:^(NSArray *allPrivatePlaces)
37     {
38         // do something after places were retrieved
39     }
40     failure:^(NSError *error) {
41         // failed with statusCode
42     }];
43 }

```

44 5.2.3 Updating a private place

45 The name or location (GeoFence) of an existing place can be changed. The best way to do this
46 is to get the existing place (see above) and change the fields as desired. **Note:** The “id” field
47 cannot be changed.

```

1  - (void)updatePlace: (QLPlace *)existingPlace
2  {
3      existingPlace.name = @"New home name";
4
5      [self.contextPlaceConnector updatePlace:existingPlace
6          success:^(QLPlace *place)
7          {
8              // do something after place update
9          }
10         failure:^(NSError *error)
11         {
12             // failed with statusCode
13         }
14     ]];
15 }
16

```

5.2.4 Deleting a private place

An existing place can be deleted. Only the id needs to be provided, not the entire place.

```

19 - (void)deletePlace: (long long)existingPlaceId
20 {
21     [self.contextPlaceConnector deletePlaceWithId:existingPlaceId
22         success:^()
23         {
24             // do something after place has been deleted
25         }
26         failure:^(NSError *error)
27         {
28             // failed with statusCode
29         }
30     ]];
31 }
32

```

5.2.5 Retrieving the top 20 private points of interest

```

32 - (void)allPrivatePointOfInterestAndOnSuccess
33 {
34     [self.contextPlaceConnector allPrivatePointsOfInterestAndOnSuccess:^(NSArray * allPrivatePointsOfInterest)
35     {
36         // do something after top 20 private points of interest were retrieved
37     }
38     failure:^(NSError *error) {
39         // failed with statusCode
40     }
41     ]];
42 }
43

```

5.3 Geofence Filtering

Gimbal SDK allows your application to selectively disable monitoring for certain places. Implement *shouldMonitorPlace* method on *QLContextPlaceConnectorDelegate* to let Gimbal SDK know if you want Gimbal to not monitor a place.

1 Gimbal SDK calls this method and monitors the place for geofence events if method returns
2 YES.

3 Gimbal SDK decides when to call this method and can call this method multiple times during the
4 day. Make sure the implementation of this method does not have long running operations, as it
5 will affect performance of you application.

6 **5.3.1 Adding delegate method**

```
7 - (BOOL)shouldMonitorPlace: (QLPlace *)place  
8 {  
9     // Return YES if place needs to be monitored  
10    // Return NO if place does not need to be monitored  
11 }
```

12 **5.3.2 Remove delegate**

13 You can remove the delegate from the place connector if you no longer wish get notified from
14 place connector.

```
15 self.contextPlaceConnector.delegate = nil;
```

16

17 **5.4 Geofence Control**

18 The geofence service can be turned off and on (as long as the user permission allows it) and
19 can be put into foreground only mode or a combined foreground/background mode.

20 The default is for both foreground and background geofencing to be enabled. To disable
21 geofencing:

```
22 [self.contextPlaceConnector dontMonitorPlacesWhenAllowed];  
23 [self.contextPlaceConnector dontMonitorPlacesInBackground];
```

24 To enable geofencing:

```
25 [self.contextPlaceConnector monitorPlacesWhenAllowed];  
26 [self.contextPlaceConnector monitorPlacesInBackground];
```

27 In addition, if you know your application will never need background mode, a property can be
28 set in your UserContext.plist file to simplify the user's privacy controls to not include the
29 background option. To disable the background privacy control, add the following property
30 named *BACKGROUND_GEOFENCING_DISABLED* with Boolean value set to YES.

6 Interest Sensing

The user's interests are profiled each day. These interests are defined by a rule set which can take from installed apps and other inputs.

6.1 Quick Start

1. Create an instance of *PRContextInterestsConnector*
2. You can retrieve interests from connector. This will return a *JSON* string with likelihood (confidence) values in the range of 0.0 to 1.0.

6.2 Listening for User Interests

6.2.1 Retrieve the connector

```
self.contextInterestsConnector = [[PRContextInterestsConnector alloc] init];
```

6.2.2 Request the Profile

```
PRProfile *interests = self.contextInterestsConnector.interests;
```

Profile fields:

Field Name	Field Type	Description
attributes	<i>NSDictionary</i>	The attributes of the profile

ProfileAttribute fields:

Field Name	Field Type	Description
key	<i>NSString</i>	Attribute key
attributeCategories	<i>NSArray</i> of <i>PRAttributeCategory</i>	Attribute categories

AttributeCategory fields:

Field Name	Field Type	Description
key	<i>NSString</i>	Category key

likelihood	<i>double</i>	A floating point value between 0 and 1 representing the likelihood that the category applies to the user
------------	---------------	--

6.2.3 Set custom profile attributes

1

```
2     PRCustomAttributes *customAttributes = self.contextInterestsConnector.  
3     customAttributes;  
4     if (customAttributes == nil)  
5         customAttributes = [[PRCustomAttributes alloc] init];  
6     [customAttributes addStringAttribute:@"attr-value" forKey:@"attr-name"];  
7     self.contextInterestsConnector.customAttributes = customAttributes;
```

8

9

7 Communicate

These are also known as rich media push notifications. They're managed by the Gimbal Communicate Manager and can be targeted to a specific audience by place and/or time.

7.1 Place based communicate

7.1.1 Quick Start

1. Start Listening for any communications coming from the Gimbal Communication services by assigning a delegate (*QLContextPlaceConnectorDelegate*) to *QLContextPlaceConnector*
2. You can retrieve the latest content events with *requestContentHistoryAndOnSuccess:success:failure:*
3. Stop Listening by removing the delegate

7.1.1.1 Listening for content

7.1.1.1.1 Initialize connectors

```
self.contextPlaceConnector = [[QLContextPlaceConnector alloc] init];
```

7.1.1.1.2 Start Listening

```
self.contextPlaceConnector.delegate = self;
```

7.1.1.1.3 Implement protocol method

```
-(void)didGetContentDescriptors: (NSArray *)contentDescriptors
{
    // do something with content
}
```

QLContentDescriptor fields:

Field Name	Field Type	Description
title	<i>NSString</i>	The title of the content
contentDescription	<i>NSString</i>	The description of the content
contentUrl	<i>NSString</i>	The content url of the content
campaignId	<i>NSString</i>	The campaign id defined by the Gimbal Manager
expires	<i>NSNumber</i>	The timestamp when this content expires

displayCount	<i>NSNumber</i>	Number of times campaign with 'campaignId' was delivered to your application
placeId	<i>NSNumber</i>	The placeId for which content was retrieved
eventTime	<i>NSNumber</i>	Latest time of the content with 'campaignId' was delivered to your application
contentAttributes	<i>QLContentAttributes</i>	Attributes of the content, defined using Manager API's or Manager UI

1

7.1.1.1.4 Stop listening

```
self.contextPlaceConnector.delegate = nil;
```

2

3

7.1.2 Retrieving content event history

4

```
[self.contextPlaceConnector
requestContentHistoryAndOnSuccess:^(NSArray *contentHistories)
{
    // do something with content
}
failure:^(NSError *error)
{
    //failed with error
}];
```

5

6

7

8

9

10

11

12

13

7.2 Time based communicate

14

Time based communicate are pushed to iOS devices using Apple push notifications. Your application has to be setup for apple push notifications before these messages can be delivered to your clients. Refer to Section 7.2.1

15

16

17

7.2.1 Setup Gimbal Push

18

To enable your application to receive push notifications from Gimbal, your application should register its device token received from Apple push service with Gimbal. If registration is successful, your application will be enabled to receive time-based content from Gimbal.

19

20

21

7.2.2 Quick Start

22

7.2.2.1 Register for Gimbal Push Notification

23

This step will register your device with Apple push service to enable push notifications. If its successful, the application delegate receives a device token in the `application:didRegisterForRemoteNotificationsWithDeviceToken:` method; if registration fails it is informed via the `application:didFailToRegisterForRemoteNotificationWithError:` method.

24

25

26

27

1 This method has to be called every time your application finishes launching, because this helps
2 the SDK to keep up-to-date with active device tokens, as device tokens may change.

```
3  
4 [QLPushNotificationsConnector registerForRemoteNotificationTypes:UIRemoteNotificationTypeAlert |  
5 UIRemoteNotificationTypeBadge | UIRemoteNotificationTypeSound];
```

6 **7.2.2.2 Register Device Token**

7 Gimbal, uses device token information, generated by apple push service, to send push
8 notifications. Call this method from application delegate's
9 `application:didRegisterForRemoteNotificationsWithDeviceToken:` method; This will enabled the
10 device to receive push notifications from Gimbal.

```
11  
12 [QLPushNotificationsConnector didRegisterForRemoteNotificationsWithDeviceToken:deviceToken];
```

13 **7.2.2.3 Listen to Remote Notifications**

14 Gimbal, has to be notified when your application receives push notification from Apple, so that
15 relevant content can be pushed to the devices. Call this method from application delegate with
16 the parameters you received in `application:didReceiveRemoteNotification:` method; SDK will call
17 you back with relevant content, refer to section 7.2.3 for listening for content.

```
18  
19 [QLPushNotificationsConnector didReceiveRemoteNotification:userInfo];
```

20 **7.2.2.4 Listen to Application Launch**

21 Call this method, from application delegate with the parameters your received in
22 `application:didFinishLaunchingWithOptions:` method; to let the SDK know that application was
23 launched.

```
24  
25 [QLPushNotificationsConnector didFinishLaunchingWithOptions:launchOptions];
```

26 **7.2.2.5 Unregister Gimbal Push Notification**

27 Push notifications can be stopped on the client using the following API. But note that it should
28 be called only if your application no longer wants to support Gimbal push notifications.

```
29  
30 [QLPushNotificationsConnector unregisterForRemoteNotifications];
```

31 **7.2.3 Listening for Content**

32 **7.2.3.1 Initialize connectors**

```
33 self.contentConnector = [[QLContentConnector alloc] init];
```


7.2.3.2 Start Listening

```
self.contentConnector.delegate = self;
```

7.2.3.3 Implement protocol method

```
-(void) didReceiveNotification: (QLContentNotification *)notification
    appState: (QLNotificationAppState)appState
{
    // do something with notification.
    // You can fetch detailed content information, using contentId. Refer to Section 7.2.4
}
```

QLNotification fields

Field Name	Field Type	Description
message	<i>NSString</i>	The message of the content
contentId	<i>NSString</i>	The contentId of the content

7.2.4 Fetching Content

Content related to delivered push notifications can be fetched from the server. Basic content is represented by *QLContent* class and consists of following fields:

Field Name	Field Type	Description
identifier	<i>NSString</i>	The id of the content
title	<i>NSString</i>	The title of the content
contentDescription	<i>NSString</i>	The description of the content
contentUrl	<i>NSString</i>	The contentUrl of the content
campaignId	<i>NSString</i>	The campaignId of the content
expires	<i>NSDate</i>	The timestamp when the content expires
contentAttributes	<i>QLContentAttributes</i>	Attributes of the content, defined using Manager API's or Manager UI

7.2.4.1 Fetching content by ID

Content related to the notification clicked by the user can be fetched from server, using *contentId*. The *contentId* will be delivered to your application as part of the notification on *contentConnector* delegate.

```
[self.contentConnector contentWithId: identifier
    success:^(QLContent *content)
    {
        // do something with notification.
    }
]
```

```

1         failure:^(NSError *error)
2         {
3             // failed to fetch content.
4         }];

```

7.2.4.2 Fetching content based on time range

Content related to notifications that user never clicked can be fetched from the server by providing a date range. This call fetches content related to all time based communications that were triggered for the client during the provided time range.

```

9     [self.contentConnector timeContentsFromStartDate:startDate
10        toEndDate:endDate
11        success:^(NSArray *timeContents) {
12            // do something with content array
13        } failure:^(NSError *error) {
14            // failed to fetch content
15        }];
16

```

The array of content consists of elements of type *QLTimeContent*. In addition to all the fields from *QLContent*, *QLTimeContent* has following additional fields:

Field Name	Field Type	Description
lastTriggerTime	<i>NSDate</i>	The timestamp when the last time trigger occurred

7.2.5 Content Search

7.2.5.1 By attribute

Content is fetched from the server based on the Query passed into this method. There are different implementations for QLQuery.

- *QLQueryForAnyAttributes*: Fetches content that matches any of the attributes defined in the query.

```

26     QLQueryForAnyAttributes *queryForAnyAttributes = [[QLQueryForAnyAttributes alloc] init];
27     [queryForAnyAttributes whereKey:@"hours-open" containsStringValue:@"10-13"];
28     [queryForAnyAttributes whereKey:@"hours-open" containsStringValue:@"17-20"];
29     [queryForAnyAttributes whereKey:@"type" containsStringValue:@"restaurant"];
30
31     [self.contentConnector contentsWithQuery:queryForAnyAttributes
32        success:^(NSArray *contents) {
33            // do something with the content array
34        } failure:^(NSError *error) {
35            // failed to search for content
36        }];
37
38

```

The above example will fetch content that matches any of the specified key/value pairs. More specifically, the key must be an exact match and the value must be *contained* within the attribute value.

7.3 Disabling Communications

Fetching of content from the server can be disabled on the client if communications are not used. To disable communications on the client add the property `COMMUNICATIONS_DISABLED` to `UserContext.plist` with Boolean value set to `YES`.

8 Permissions (Gimbal Privacy)

8.1 Listening for permission change

The user can control the kinds of information that they are willing to share with your application. It is important that your app gracefully fail should the user remove your app's access to Gimbal's functionality.

QLContextCoreConnector, *QLContextPlaceConnector* and *PRContextInterestsConnector* need permissions that have to be enabled by the users for your application to work. The user can change these permissions at any time.

You can request the current permissions the user has granted your application and listen to changes that the user makes to your app's permissions using the corresponding connector.

8.1.1 Start Listening for subscription permission

Permission that allows your application to use Gimbal services

```
self.contextCoreConnector.permissionsDelegate = self;
```

8.1.2 Implement protocol method

```
-(void)subscriptionPermissionDidChange: (BOOL)subscriptionPermission  
{  
    // do something when subscription permission changed  
}
```

8.1.3 Start Listening for location permission

Permission that allows your application to receive geofence events and location based campaigns.

```
self.contextPlaceConnector.delegate = self;
```

8.1.4 Implement protocol method

```
-(void)placesPermissionDidChange: (BOOL)placesPermission  
{
```

```
1      // do something when location permission changed
2  }
```

3
4 Note: See section 4.1.1

5 In a nutshell, if *subscriptionPermission* or *placesPermission* is false, your application will
6 not receive geofence events. In addition any campaign events triggered by a change in
7 the user's location will not apply to this particular user until they turn the permission
8 back on. It is in the interest of your application to drive the user to allow this permission
9 for maximum efficiency.

10 If *enabled* or *profileEnabled* is 'false', this means that any campaign that relies on profile
11 attributes (like Age, Gender, Income, etc.) will not match this user. User Context will assume
12 that this user profile is generic and fits all categories. It is in the interest of your application to
13 encourage the enabling of profile permissions so that user receives very focused/relevant
14 content.

15 **8.1.5 Stop listening**

```
16 self.contextPlaceConnector.delegate = nil;
17 self.contextCoreConnector.permissionsDelegate = nil;
18
```

9 Analytics

9.1 About

Analytic APIs allow developers to log different type of events. Each event requires data to be provided by the developer for logging the events successfully. Logged events are later converted into meaningful reports in the Manager module.

9.2 Types of Analytic Events

There are 3 different types of `QLAnalyticEvent`. Use one of the following subtypes of `QLAnalyticEvent` to log the desired event.

9.2.1 `QLContentNotifiedEvent`, `QLContentClickedEvent`, and `QLContentDisplayedEvent`

Use one of these three events to log, based on what you would like to log.

Field Name	Field Type	Description
time	<i>NSDate</i>	The timestamp when the user was notified, clicked, or displayed of the content. Current time is initialized by default.
trigger	<i>QLPlaceTrigger</i>	PlaceTrigger lets you set id of the place that triggered notified event. This field is optional.
contentId	<i>NSString</i>	Identifier of the content you would like to log. This field is mandatory.

9.3 Analytics Connector

Exposes a static method to log analytic events. Errors are reported back to the developer via the error reference object passed in as a part of the API.

Note: If you're not interested in error object, just pass NULL for error: parameter. Errors will be just logged on the console.

```

QLPlaceTrigger *placeTrigger = [[QLPlaceTrigger alloc] initWithPlaceId:@"place-id"];
QLContentNotifiedEvent *event = [[QLContentNotifiedEvent alloc] initWithContentId:@"content-id"
                                trigger:placeTrigger];
NSError *error = nil;
[QLAnalyticsConnector log:event error:&error];

```

10 Getting events when your application is not running

Gimbal SDK monitors place events in the background, you can listen (with a delegate) for place events and take action, such as putting up a notification when appropriate.

Be aware that if you are not declared as a continuous background application, that you will have very little time to actually take any action during the callback – total time including the time SDK has already used is 10 seconds.

If you are a continuous background application, you can start listening for location changes (and ignore them) during these callbacks and you will typically have 10 minutes of processing time. Using this mechanism to gain additional time will require a warning for your application in the App Store and if your actual event processing takes significant time, the battery drain will be significant.

1

2

11 Error codes and messages

3

4

5

To make the development of your application easier, Gimbal application sends back meaningful error codes and error messages. Reference to these can be found in ContextConnectorError documentation.

6